


- The product is suitable for indoor use with enclosure standards - Ip20, for indoor installation and in areas not exposed to moisture or water!
- Lighting meets all important CE, RoHS certificates for everyday use.
- Light sources are LED strips fitted with SMD components.
- The product is guaranteed for 24 months from the date of sale.

The warranty does not cover damage caused by improper handling, accidents, wear, use of things contrary to manufacturer's images, failure to contact users.

Furthermore, the warranty does not cover damage caused by atmospheric effects, overvoltage, mechanical damage or electrical damage to the entry and exit beds and power assemblies.

- The luminaire surface can be cleaned with a dry and damp cloth with available cleaning agents running.
- The light is dimmable.
- The remote control is powered by a 2025 lens battery. If the remote control is no longer used, replace the battery.
- In the event of problems, only authorized persons with valid qualification according to Decree No. 50/1978 Coll. or contact us at info@li-go.cz

● LED picture light with backlit motif

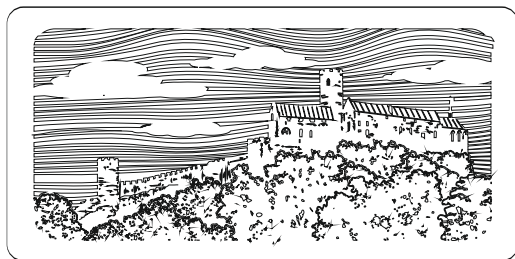

Weight:

2.1 - 10 kg (depending on image size)

Used material:

- pine / beech plywood
- composite material

Decorative light color:

shades of white

Power / current for decorative light:

1m LED strip 4,8W / 0,4A

Lamp / source input voltage:

100-240V AC

Output voltage / current source:


12V DC / 1.5A-2A

Source Performance:


15W-24W

LED lamp lifetime:

50,000 hours at full intensity



● 2x





● 2x



- Two wall plugs are included for wall mounting

- Measure and mark a span of 230 mm on your wall and drill Ø5mm holes in the wall.
- Insert anchors in the holes and screw hook nails in the anchors.
- Hang the picture .

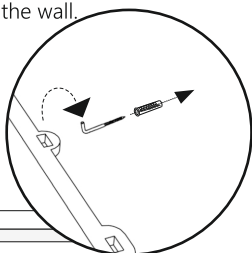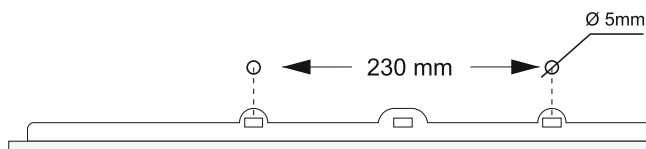

- Connect the light image to a 230 V mains


a/ directly to the 230V socket

The power cable can be glued to the wall with a transparent double-sided tape.
(Adhesive tape not included.)

b / connection to the prepared wall outlet 230V

Remove the luminaire lead cable. Unscrew the cable retaining plate on the bottom rail.
Connect the prepared 230V cable (CYKY 2x1,5 mm) to the terminal block

Diagram:

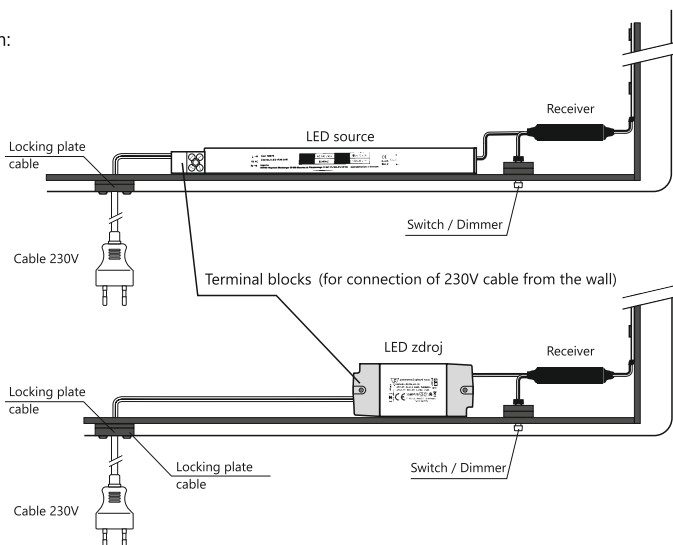

- You can control the light image

a / button located on the light image.

Press to switch the light on or off. Press and hold to adjust the brightness of the light.

b / remote control. The remote control is not included. There are several types to choose from.


Multiple lights can be controlled with one control.

If the picture is connected to an existing electric circuit with switch, the light can be switched off using the wall switch.


● 12V / 24V DC Remote Controller (Optional available at www.li-go.cz/prislusenstvi)




dimLED OV MK1
-small, magnet mounting



dimLED OV KN1K
- with frame, rotatable



dimLED OV KN1K
- with double, lever frame



dimLED OV PV
- under the button